

# MF 3 SPECIALITY SERIES

VI-SP-FR-GE-WF-AL

75–120 HP

SPECIALISTS  
LIKE YOU



MASSEY FERGUSON

BORN TO **FARM**



# MF 3 SPECIALITY SERIES COMPACT, AGILE AND STRONG

There are many high-value crops and growing systems, that's why Massey Ferguson have been working closely with farmers and growers across the world to introduce significant new features to enhance performance and comfort on the MF 3 Speciality series – a range tailored to each crop needs.

The six high quality specialist tractor models, with powers from 75 hp to 120 hp, offer a choice of a spacious cab or low platform in a variety of widths and profiles. Available in Essential and Efficient specification packages, they also come with a range of options to personalise each MF tractor to specifically suit the requirements of every different crop.

A new flagship model expands the range from 75 hp up to 120 hp and cab models from 85 hp have a new five-speed transmission, which is not only smoother to use, but also ensures there's the right speed for every operation. Other new features include 40 km/h Eco and Brake-to-Neutral, which reduce running costs while increasing comfort.

This is all wrapped up in the modern, eye-catching style inherited from the larger tractors, with the iconic MF grey sabre stripe and cab, which will make you proud to be part of the Massey Ferguson family.



MF 3VI

32



MF 3FR

36



34

MF 3SP

MF 3AL

42



38

MF 3GE



40

MF 3WF



Tailored to your needs.....	8
Power with no Compromise .....	10
Efficient Driveline.....	12
Designed to Handle Every Task .....	16
Spacious, Comfortable Cab .....	20
Comfortable Platform Versions .....	24
Cost Effective 75 HP models .....	30
MF 3VI .....	32
MF 3SP.....	34
MF 3FR.....	36
MF 3GE.....	38
MF 3WF.....	40
MF 3AL.....	42
Parts & Service .....	46




# MF 3 SPECIALITY SERIES

FROM 85 HP TO 120 HP WITH CAB VERSIONS AND MF 3AL FLAT FLOOR CAB.

These tractors deliver exactly the right features for straightforward, comfortable operation and high performance with low running costs.

	MF 3VI	MF 3SP	MF 3FR	MF 3WF	MF 3AL
Power (hp)	85/ 95/ 105/ 120				85/ 95/ 105
Engine	4-cylinder / 3.6 L / Stage V				
Transmission	15F/15R Mech. Shuttle 30F/30R Mech. Shuttle 30F/15R, PowerShuttle and Speedshift				30F/15R, PowerShuttle and Speedshift
Operator environment	Cab flat-floor version				

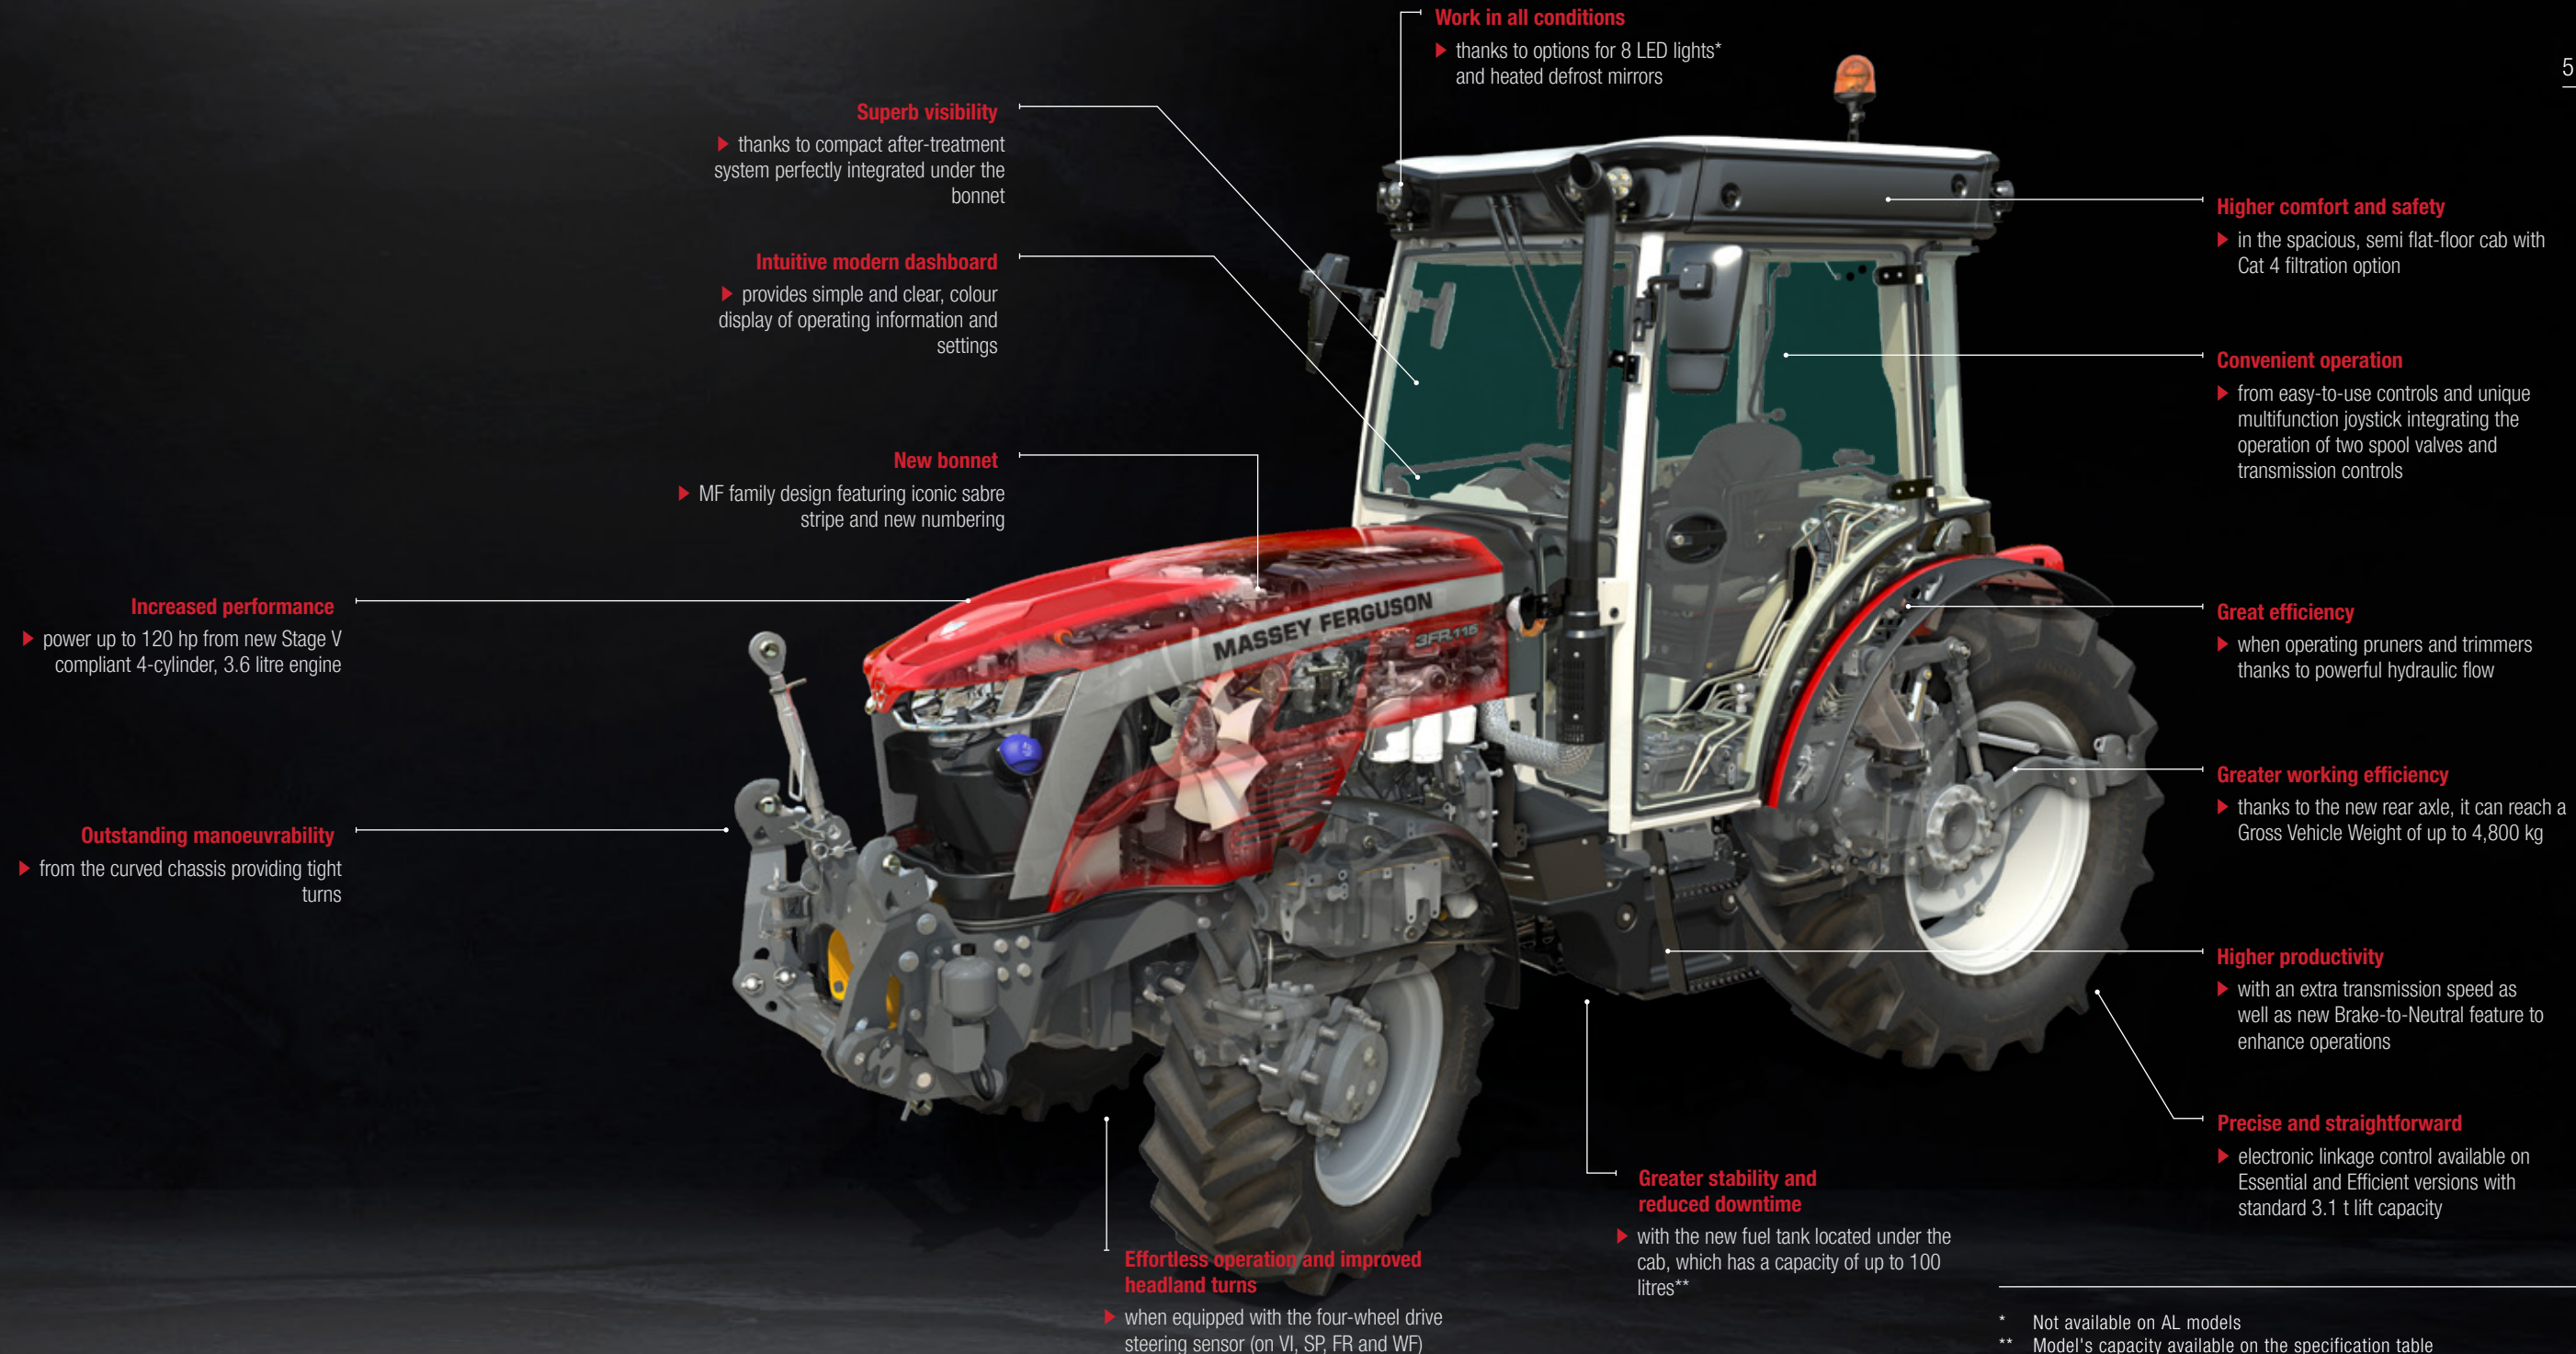

\* Not available on AL models  
\*\* Model's capacity available on the specification table



# MF 3 SPECIALITY SERIES

THE STRAIGHTFORWARD AND DEPENDABLE  
CHOICE IN A COMFORTABLE AND ERGONOMIC  
ENVIRONMENT FOR EVERY SECTOR FROM 85 HP,  
MF 3FR / GE / WF PLATFORM VERSIONS

	MF 3FR	MF 3WF	MF 3GE
Power (hp)	85/ 95/ 105		
Engine	4-cylinder / 3.6 L / Stage V		
Transmission	12F/12R Mech. Shuttle 24F/24R Mech. Shuttle 24F/12R, PowerShuttle and Speedshift		
Operator environment	Platform version		

**Modern family design**  
► featuring iconic MF sabre stripe and logical model numbering

**Outstanding manoeuvrability**  
► from the sculpted chassis that helps deliver tight turns

**Increased performance**  
► from the latest, Stage V compliant 4-cylinder, 3.6 litre engine

**Convenient and comfortable operation**  
► with easy-to-use controls

**Easy access**  
► to the large fuel tank providing maximum capacity to save time refilling

**Wide transmission choice**  
► from a straightforward mechanical transmission through to the high specification version equipped with PowerShuttle and Speedshift

**Excellent accessibility to low and confined areas**  
► thanks to the tractors' compact dimensions and foldable ROPS frame

**Superb visibility**  
► ensured by after-treatment system perfectly integrated under the bonnet

**Powerful hydraulic flow**  
► delivers high efficiency for operating pruners and trimmers

**High performance with versatility**  
► offering up to 3 t maximum lift capacity compatible with strong front linkage and PTO option





## TAILORED TO YOUR NEEDS

MF 3 Speciality Series is designed for specialist applications and includes six different versions and widths to ensure there is a model to suit the needs of every crop and grower. Starting at just 1 m wide, the wide range includes models with or without cabs and with various chassis sizes and axle widths that deliver the dimensions, power, manoeuvrability and stability for every operation.

Great manoeuvrability is ensured by a 55° steering angle\*, as well as the integration of the engine into the curved chassis, which enables the wheels to turn inside, under the bonnet.

An MF 3WF fitted with 280/70R18 tyres, for example, offers a turning radius of just 3.41 m, which delivers really tight turns on the headland and when working around buildings.

Front axle drive is controlled during turns by the optional, 4WD management. Simply activated with one switch, sensors detect the steering angle and disengage and engage drive, effortlessly providing easy, tight turns while maintaining traction.

A suspended front axle, to further increase comfort on the road and uneven terrain is available for the MF 3VI, SP, FR and AL models. Totally integrated to the tractor design, it provides superior traction, while maintaining the good ground clearance, excellent steering angles and perfect manoeuvrability.

All the new MF 3 Speciality Series tractors benefit from a higher Gross Vehicle Weight (GVW) and improved braking, which enable them to handle larger implements and increase productivity.

\*52° on FR and WF models



### Vineyard (VI)



From 1.00 m wide, the MF 3VI is ideal for use in traditional narrow vineyards. Available only with a cab, it offers power from 75 hp to 120 hp.

### Specialised (SP)




From 1.25 m wide, the MF 3SP is designed for more open vineyards. With a more spacious cab, it offers power from 75 hp to 120 hp.

### Fruit (FR)



From 1.45 m wide the MF 3FR is perfect for extensive vineyards and orchards. A more substantial tractor with a wider front axle. It's available from 75 hp to 120 hp and in platform versions up to 105 hp.

### Ground Effect (GE)

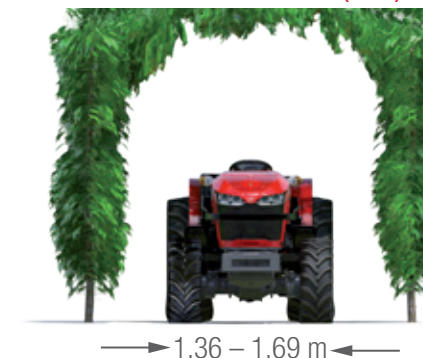

From 1.36 m wide, the platform version is ideal for work under trees, in polytunnels and in canopied vineyards. This low profile MF 3GE is available from 75 hp to 105 hp.

### Wide Fruit (WF)



From 1.70 m wide MF 3WF has a wider front and rear axle and is ideal for hillside vineyards or orchards. Available with powers from 75 hp to 120 hp, and in platform versions up to 105 hp.

### Alpine (AL)



Available a flat-floor cab, the versatile MF 3AL is designed and built for hilly terrain. With a 1.40 m wide cab, it is also the perfect light utility tractor and offers powers from 85 hp to 105 hp.



# POWER WITH NO COMPROMISE

ENGINE POWER FROM A NEW 3.6 LITRE, FOUR-CYLINDER IN THE MF 3 SPECIALITY MODELS STARTS AT 85 HP AND NOW GOES UP TO 120 HP IN THE LATEST FLAGSHIP MODEL.



Fitted under the cab, the standard fuel tank holds 75 litres, while a 100 litre option for cab\* models allows you to work longer between refills. Both are easy to fill thanks to the easy-to-access cap location.



Delivering more power that their names suggest, MF 3XX.115 models actually deliver up to 120 hp and 466 Nm of torque at just 1,500 rpm. Combined with a high Gross Vehicle Weight (GVW) and extra lift capacity the new top model has the strength and power to operate larger and more complex implements to boost productivity. It's available with or without a cab.

Engine curves have been redesigned by Massey Ferguson to ensure the best performance in all applications. Maximum power and torque is attained at low engine rpm, reducing fuel consumption and noise for maximum comfort and lower running costs.

	MF 3xx.85	MF 3xx.95	MF 3xx.105	MF 3xx.115
Power (hp)	85	95	105	120
Torque (Nm)	370	395	405	466
Engine	4-cylinder / 3.6 L / Stage V			
Cab models	VI / SP / FR / WF / AL		VI / SP / FR / WF / AL	VI / SP / FR / WF
Platform models	FR / GE / WF		-	

\* MF 3VI cab models available with max of 75 L

MF 3 SPECIALITY SERIES - POWER & TORQUE CURVES

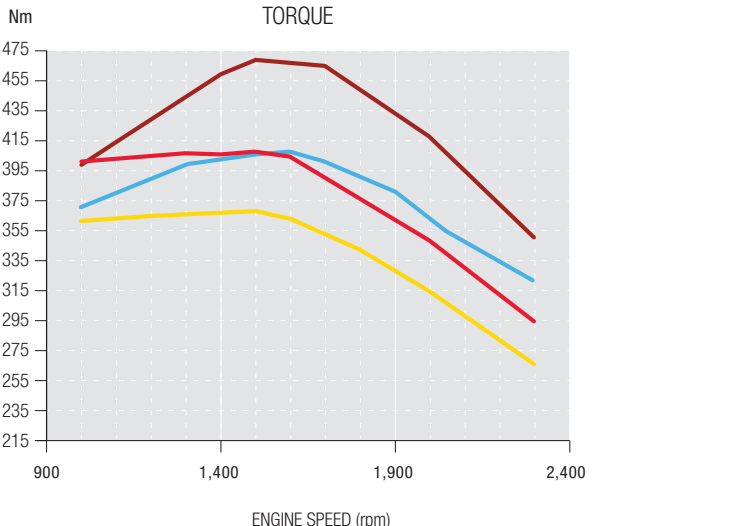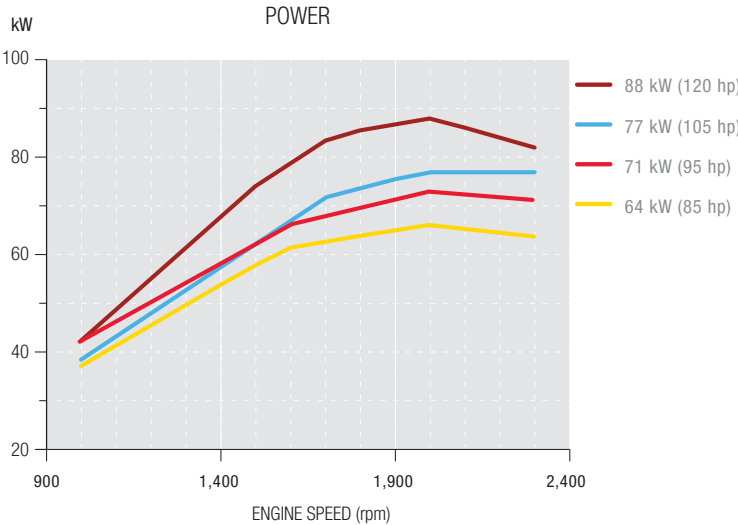



## EFFICIENT DRIVELINE CAB VERSIONS



**MF 3 SPECIALITY SERIES, FITTED WITH A CAB, BENEFIT FROM A NEW, FIVE-SPEED TRANSMISSION THAT ENSURES OPERATORS CAN ALWAYS MATCH THE CORRECT FORWARD SPEED WITH ENGINE SPEED FOR ALL APPLICATIONS.**

For optimum efficiency and ease of use, the new 30F/15R speed Eco transmission is available. This achieves speeds of up to 40 km/h at 1,700 rpm, which reduces noise making it more comfortable for operators, while cutting fuel consumption and running costs.

As well as providing five gears in three ranges, the 30F/15R Eco transmission is equipped with PowerShuttle and Speedshift as standard. Together, these enable up to ten gears to be changed, without using the pedal, by simply using the declutch splitter switches, mounted on the new gear lever.



▲  
New gear lever with bowden cable for smooth operation.



▲  
Efficient operation with five-speed gears in all applications.



# RELIABLE TRANSMISSIONS PLATFORM VERSIONS



## MF 3 SPECIALITY PLATFORM VERSIONS FEATURE THE WELL PROVEN 12 X 12 TRANSMISSION, WITH FOUR GEARS IN THREE RANGES.

With the addition of a mechanical splitter this doubles the gears to 24 x 24, providing a wider choice of speeds to match the application.

There is also the option of a 24 x 12 transmission, equipped with PowerShuttle and Speedshift.

Transmission buttons located on the gear lever allow operators to de-clutch as well as change the Speedshift from Hi to Lo.

This greatly enhances driving comfort and efficiency by enabling operators to change eight ratios in each range without operators having to use the foot pedal.





## DESIGNED TO HANDLE EVERY TASK



### THE MF 3 SPECIALITY SERIES IS DESIGNED AND BUILT FOR HARD WORK.

High linkage capacities, up to 3.1 t on cab models or 3 t on platform versions, allow these sturdy specialist tractors to handle large and complex machines with ease.


Essential specification provides straightforward mechanical control of the linkage with a convenient lever arrangement in cab. Massey Ferguson's renowned Electronic Linkage Control (ELC) is standard on Efficient models and is available as an option on Essential specification.

Precise linkage control and setting is provided by a rotary dial, located on the armrest or on the right console, while a rocker switch offers a choice of three positions – up, down or neutral.

Operators can also control the rear linkage using two switches. Conveniently located on the fenders, these are a great help when hitching attachments and implements.



▲ SPEEDSTEER reduces operator effort for faster operation on the headland and it enables the operator to adjust the steering ratio.

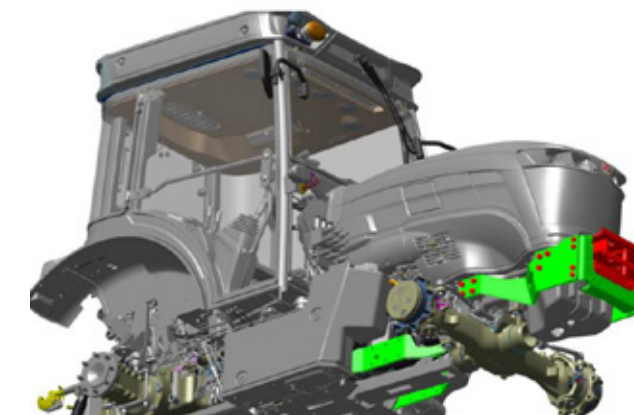

▲ Lateral and front tool frames maximise compatibility with implements from various manufacturers.

For optimum implement setting and control is the rear linkage offset and levelling option. Adjustments are easily made, from the cab, using rocker switches on Essential versions, while an exclusive mini-joystick provides intuitive operation on Efficient models.

Further increasing the versatility is the powerful front linkage capacity up to 1,650 kg, which helps boost productivity by employing front- and rear implement combinations.

Alternatively there is a new front implement support, as well as new lateral supports for mid-mounting equipment. Together they increase versatility providing the option to use a combination of front-, mid- and rear-mounted implements to save time and reduce the number of passes.



# BUILT FOR HARD WORK

VERSATILE POWER FOR  
EVERY IMPLEMENT



**MF 3 SPECIALITY TRACTORS ARE AVAILABLE WITH CHOICE OF HYDRAULIC SYSTEMS TO SUIT YOUR REQUIREMENTS WITH A DUAL-PUMP CIRCUIT DELIVERING 93 LITRES/MIN OR A TRIPLE-PUMP SET-UP GENERATING A MASSIVE 120 LITRES/MIN.**

This generous hydraulic capacity is matched by a wide choice of spool valves across the range, with mechanical operation on Essential versions and electro-hydraulic control included in the Efficient specification.

Mid-mounted machines are controlled via couplers connected to the rear spool valves. A new diverter option allows control of up to six mid-mounted couplers using switches on the hydraulic lever on Essential models and with the multifunction joystick on the Efficient versions.

Up to eight mid-mounted couplers can be specified, with six controlled through the diverter connected to one spool valve, and the two others controlled by the second spool valve equipped with flow regulator.

Together, this combination of high hydraulic flow, spool valve choice and straightforward control offers the opportunity to operate modern complex machines with ease.

## WIDE PTO SPEED CHOICE

A wide choice of PTO speeds enable the new MF 3 Speciality Series to power a broad range of implements and attachments. A two-speed PTO is standard – with the choice of: 540 / 540 Eco and 540 / 1,000, both with ground speed PTO.

PTO engagement is via mechanical or electro-hydraulic control, depending on the transmission choice.

A front PTO, offering speeds of 540 Eco or 1,000 – is available to further extend the versatility of the front linkage option.



Choose between the dual- or triple-pump system as well as the number of mid-mounted connectors required.





SPACIOUS, COMFORTABLE  
**CAB**

◀ The higher seat position and the wiper motor located in the roof both increase visibility, without impacting on the overall cab height.

**THE MF 3 SPECIALITY SERIES CAB DELIVERS THE SPACE, VISIBILITY AS WELL AS THE CONTROL AND COMFORT OPERATORS NEED FOR WORKING LONG HOURS IN HIGH VALUE CROPS.**

Surprisingly roomy for a specialist tractor, the large cab has a deeper roof space providing more headroom, even for the tallest operators. There is also more floorspace, thanks to the flat floor fitting closely to the transmission tunnel and a new pedal arrangement.

Repositioning the gear lever not only improves access, it also makes it easier to operate as well, with cable operation making easier, smoother changes.

Efficient specification MF 3 Speciality Series tractors feature the renowned right-hand armrest that offers easy to use controls and unique MF multifunction joystick. This provides effortless, single-handed operation of the hydraulic and transmission functions including declutch, forward and reverse selection as well as Speedshift operations.

Operators can focus on the implement and the work quality, with every action easy to select – just like the other unique Massey Ferguson joystick for rear linkage levelling and offset.

In addition with the new headland management feature from the dashboard it's now possible to control five functions with one operation: front PTO, rear PTO, high low gears, rear linkage and engine memos.



▲ A bright colour screen on the new intuitive dashboard shows all the essential operating information. It also displays all the main settings.



▲ New electronic linkage control (ELC) ensures accuracy and ease of use – standard on Efficient and option on Essential versions.

▲ Repositioned transmission levers and pedals further increase leg space.



# MORE COMFORT FOR GREATER PRODUCTIVITY



◀ When long days extend into the night, there's the option of eight LED lights to help you keep going in the dark.

▶ Operators will find everything in the right place, with controls logically laid out on the right hand console on all versions.



▲ Massey Ferguson cares about farmers' health as much as they care about their crops, offering the option of Cat 4 cab filtration to increase safety when spraying. Easily activated by a switch, the system pressurises the cab – converting it from Cat 2 to Cat 4 – providing optimum protection.

A cab filter service indicator on the dashboard ensures operators remain protected.



◀ Front axle suspension further increases comfort on the road and uneven terrain, while protecting from shocks and bumps.





## COMFORTABLE PLATFORM VERSIONS



A STRAIGHTFORWARD, COMFORTABLE PLATFORM IS AVAILABLE FOR MF 3FR, MF 3WF AND MF 3GE MODELS, POWERED BY A 3.6 LITRE ENGINE, OFFERING POWERS FROM 85 HP UP TO 105 HP.

With its easy to use controls and foldable ROPS, the platform versions are ideally suited to working in polytunnels and under trees or vines, as well as offering great access into low buildings. These platform models come with a wide transmission choice, including the renowned 24F/12R with Speedshift and PowerShuttle. With powerful hydraulics and linkage, the agile tractors deliver performance with versatility.



Thanks to the low platform the MF 3GE performs well in low tunnels and areas with restricted access.



# MADE FOR COMFORT

Essential is the entry-level for the MF 3 Speciality Series, but it's far from basic.

It provides all the key elements you would expect from Massey Ferguson, with a blend of simplicity, ease of use and versatility to suit applications that require power and performance.

\* Information valid for models from 85 hp

## ESSENTIAL VERSION

	ESSENTIAL PLATFORM*	ESSENTIAL CAB*
STANDARD	12 x 12 Mechanical transmission	15 x 15 Mechanical transmission
	Dual-pump hydraulic system	Dual-pump hydraulic system
OPTION	93 L/min	93 L/min
	Two rear mechanical spool valves	Two rear mechanical spool valves
	2.5 t capacity mechanical rear linkage	3.1 t capacity mechanical rear linkage
	Mechanical PTO engagement	Mechanical PTO engagement
		Air conditioning cab
OPTION	24 x 24 Mechanical transmission	30 x 30 Mechanical transmission
	24 x 12 PowerShuttle & Speedshift transmission	30 x 15 PowerShuttle & Speedshift transmission
	Triple-pump hydraulic system	Triple-pump hydraulic system
	Three rear mechanical spool valves	Three rear mechanical spool valves
	Rear linkage 3 t lift capacity	Up to eight mid-mounted couplers
	Hydraulic PTO engagement	Rear Electronic Linkage Control (ELC)
	Front linkage and PTO	Hydraulic PTO engagement
		Front linkage and PTO
		Rear linkage offset and levelling (depending on version)
		CAT 4 cab filtration
		LED work lights on cab





# MADE FOR COMFORT

Efficient is the high specification package for the versatile MF 3 Speciality Series, designed to help you work smarter and get better results.

Dedicated to delivering increased productivity thanks to its key features, the Efficient package enables you to work faster, to a higher standard, with more accuracy, together with high levels of comfort, ergonomics and reliability. Stay in control of the most technologically advanced and demanding implements to take advantage of their increased productivity.

\* Information valid for models from 85 hp



EFFICIENT

	EFFICIENT CAB*
STANDARD	30 x 15 PowerShuttle & Speedshift transmission
	Triple-pump hydraulic system
	120 L/min
	Four rear electronic spool valves
	Rear Electronic Linkage Control (ELC)
	Hydraulic PTO engagement
	Multifunction hydraulic/transmission joystick
OPTION	Air-conditioned cab
	Up to eight mid-mounted couplers
	Front linkage and PTO
	Front loader package (MF 3AL)
	Rear linkage offset and levelling joystick control (according to version)
	CAT 4 cab filtration
	LED work lights on cab

MECHANICAL MULTIFUNCTION  
LOADER JOYSTICK MAIN FUNCTIONS

A Lift	
B Lower	
C Fill	
D Dump	
COMBINED FUNCTIONS	
A/C Lift and fill	
A/D Lift and dump	
B/C Lower and fill	
B/D Lower and dump-bucket adjustment to horizontal position	





# COST EFFECTIVE

## 75 HP MODELS



ENTRY-LEVEL, 75 HP MF 3 SPECIALITY TRACTORS ARE POWERED BY THE LATEST 3.4 LITRE, STAGE V, 4-CYLINDER ENGINE. LIKE THE MORE POWERFUL MODELS, THEY ARE ALSO AVAILABLE WITH THE SAME CHOICE OF ESSENTIAL SPECIFICATION PACKAGES.

Massey Ferguson has retained the use of well-proven components, which deliver renowned reliability as well as keeping costs down. Operators will, however, appreciate the updated air-suspended seat.

All 75 hp MF 3 Speciality tractors come with a choice of transmissions to suit different applications and levels of investment. The wide choice begins with a practical 12 x 12, fully mechanical transmission and goes up to a 24 x 12 with PowerShuttle and Speedshift.

There is also the option to choose between the 120 litre/min triple-pump or dual-pump 93 litre/min hydraulic systems, a wide choice of spool valve configurations and optional mid-mounted spools or couplers.

In common with the rest of the range, the 75 hp models follow Massey Ferguson's new family style, with the latest modern styling, smart sabre design and grey cab and roof.

	ESSENTIAL PLATFORM*	ESSENTIAL CAB*
STANDARD	12 x 12 Mechanical transmission Dual-pump hydraulic system 93 L/min Two rear mechanical spool valves Mechanical rear linkage 2.5 t capacity Hydraulic PTO engagement	12 x 12 Mechanical transmission Dual-pump hydraulic system 93 L/min Two rear mechanical spool valves Mechanical rear linkage 2.5 t capacity Hydraulic PTO engagement Air-conditioned cab
OPTION	24 x 24 Mechanical transmission 24 x 24 Mechanical transmission with Speedshift 24 x 12 PowerShuttle & Speedshift transmission Triple-pump hydraulic system Three rear mechanical spool valves Rear linkage 3 t lift capacity Front linkage and PTO Rear linkage offset and levelling (depending on version)	24 x 24 Mechanical transmission 24 x 24 Mechanical transmission with Speedshift 24 x 12 PowerShuttle & Speedshift transmission Triple-pump hydraulic system Three rear mechanical spool valves Up to six mid-mounted couplers Front linkage and PTO Rear linkage offset and levelling (depending on version)





# MF 3VI

## VINEYARD VERSION

THE MF 3VI IS AN EXCEPTIONALLY COMPACT, YET POWERFUL TRACTOR, ESPECIALLY DESIGNED TO WORK IN CLOSELY-SPACED ROWS TO MINIMISE THE RISK TO DELICATE FOLIAGE AND FRUIT.

Starting at just 1 m wide, and with excellent manoeuvrability, the MF 3VI will perfectly wriggle in and out of the rows, easily manoeuvring from one to another.

### KEY FEATURES:

- ▶ Access narrow and tight spaces
- ▶ New engine power up to 120 hp
- ▶ New 40 kph Eco transmission (from 85 hp)
- ▶ Automatic 4WD management
- ▶ Excellent manoeuvrability, optional Speedsteer
- ▶ Great 360° visibility
- ▶ Powerful linkage and hydraulics
- ▶ Comfortable cab from 1 m wide
- ▶ Wide range of options: LED lights, defrosting mirrors, Deluxe air-suspended seat, headland management



		MF 3VI.75	MF 3VI.85	MF 3VI.95	MF 3VI.105	MF 3VI.115
Operator environment		Cab	Cab	Cab	Cab	Cab
Engine						
Max power (ISO 14396) @2,000 rpm	hp (kW)	75 (55)	85 (66)	95 (71)	105 (77)	120 (88)
Max torque	Nm	320	370	395	405	466
No. of cylinders / Capacity	No./cm³	4/3,400	4/3,600			
Fuel tank capacity	Litres	74	75	75	75	75
AdBlue tank capacity	Litres	–	10.8			
Transmission						
Standard transmission Mech. shuttle		12 x 12 (30 km/h)	15 x 15 (40 km/h)			
Optional transmission Mech. shuttle, Mech. splitter		24 x 24 (40 km/h)	30 x 30 (40 km/h Eco)			
Optional transmission Mech. shuttle & Speedshift		24 x 24 (40 km/h)	n/a			
Optional transmission PowerShuttle and Speedshift		24 x 12 (40 km/h)	30 x 15 (40 km/h Eco)			
30 x 15 transmission with brake-to-neutral		–	○			
Suspended front axle		○				
Automatic 4WD with steering angle sensors		○				
Linkage						
Maximum lift capacity at link end	kg	2,500	3,100			
Hydraulic right lift rod		○				
Hydraulic levelling & offset		○				
Optional front linkage – max lift capacity at link end	kg	1,650				
Hydraulics & PTO						
Dual pump system / Triple pump system – max. flow	l/min	93 / 120				
Maximum couplers rear / mid-mounted	No.	8 / 6	8 / 8			
Rear PTO Speeds		540 /540 Eco or 540 / 1,000				
Ground Speed PTO		○				
Front PTO – PTO speed		○ 540 Eco or 1,000				
Operator environment						
Air conditioning		●				
Air-suspended seat		○ Essential version	○ Essential version / ● Efficient version			
Deluxe air-suspended seat		–	○			
Cat 4 filtration		–	○			
8 LED working lights		–	○			
Speedsteer steering system		–	○			
Headland management		–	○			

- Standard specification
- Optional
- Not available



# MF 3SP

## SPECIALISED VERSION

THE MF 3SP IS A COMPACT AND TRULY PRODUCTIVE TRACTOR SPECIFICALLY DESIGNED FOR WORK IN MODERN VINEYARDS GROWING HIGH YIELDING AND VALUABLE CROPS.

Combining high performance with compact dimensions it is able to pass through delicate crops while minimising the risk of damage.

Starting at 1.25 m wide, the MF 3SP is available with a choice of five engine powers from 75 hp to 120 hp.

### KEY FEATURES:

- ▶ Access narrow and tight spaces
- ▶ New engine power up to 120 hp
- ▶ New 40 kph Eco transmission (from 85 hp)
- ▶ Automatic 4WD management
- ▶ Excellent manoeuvrability, optional Speedsteer
- ▶ Great 360° visibility
- ▶ Powerful linkage and hydraulics
- ▶ Comfortable 1.2 m wide cab
- ▶ Wide range of options: LED lights, defrosting mirrors, Deluxe air-suspended seat, headland management



		MF 3SP.75	MF 3SP.85	MF 3SP.95	MF 3SP.105	MF 3SP.115
Operator environment		Cab	Cab	Cab	Cab	Cab
Engine						
Max power (ISO 14396) @2000 rpm	hp (kW)	75 (55)	85 (66)	95 (71)	105 (77)	120 (88)
Max torque	Nm	320	370	395	405	466
No. of cylinders / Capacity	No./cm³	4/3,400	4/3,600			
Fuel tank capacity / optional capacity	Litres	74 /104	75 /100	75 /100	75 /100	75 /100
AdBlue tank capacity	Litres	–	10	10	10	10
Transmission						
Standard transmission Mech. shuttle		12 x 12 (30 km/h)	15 x 15 (40 km/h)			
Optional transmission Mech. shuttle, Mech. splitter		24 x 24 (40 km/h)	30 x 30 (40 km/h Eco)			
Optional transmission Mech. shuttle & Speedshift		24 x 24 (40 km/h)	–			
Optional transmission PowerShuttle and Speedshift		24 x 12 (40 km/h)	30 x 15 (40 km/h Eco)			
30 x 15 transmission with brake-to-neutral		–	○			
Front axle suspension		○				
Automatic 4WD management		○				
Linkage						
Maximum / optional lift capacity at link end	kg	2,500 /3,000	3,100 / –			
Hydraulic right lift rod		○				
Hydraulic levelling & offset		○				
Optional front linkage – max lift capacity at link end	kg	1,650				
Hydraulics & PTO						
Dual pump system / Triple pump system – max flow	l/min	93 / 120				
Maximum couplers rear / mid-mounted		8 / 6	8 / 8			
Rear PTO Speeds		540 /540 Eco or 540 / 1,000				
Ground Speed PTO		○				
Front PTO – PTO speeds		○ 540 Eco or 1,000				
Operator environment						
Air Conditioning		●				
Air-suspended seat		○ Essential version	○ Essential version / ● Efficient version			
Deluxe air-suspended seat		○				
Cat 4 filtration		–	○			
8 LED working lights		–	○			
Speedsteer steering system		–	○			
Headland management		–	○			

- Standard specification
- Optional
- Not available



# MF 3FR

## FRUIT VERSION

THE MF 3FR IS DESIGNED PARTICULARLY FOR OPERATING IN EXTENSIVE VINEYARDS AND ORCHARDS, WHICH OFTEN COVER LARGE AREAS. WITH ITS COMPACT DIMENSIONS, HIGH POWER AND EXCELLENT MANOEUVRABILITY IT DELIVERS HIGH PRODUCTIVITY THAT'S REQUIRED, WHILE ALSO ENSURING TENDER FOLIAGE OR FRUIT ARE PROTECTED FROM DAMAGE.

The ideal all-rounder, the MF 3FR is narrow enough to work between large rows, while its wide axles provide stability and safety in all applications.

### KEY FEATURES:

- ▶ Agile and powerful
- ▶ New engine power up to 120 hp
- ▶ New 40 km/h Eco transmission (from 85 hp cab)
- ▶ Automatic 4WD management
- ▶ Excellent manoeuvrability, optional Speedsteer
- ▶ Great 360° visibility
- ▶ Powerful linkage and hydraulics
- ▶ Comfortable 1.2 m wide cab
- ▶ Easy access platform
- ▶ Wide range of options: LED lights, defrosting mirrors, Deluxe air-suspended seat, headland management



		MF 3FR.75	MF 3FR.85	MF 3FR.95	MF 3FR.105	MF 3FR.115	MF 3FR.75	MF 3FR.85	MF 3FR.95	MF 3FR.105
Operator environment		Cab	Cab	Cab	Cab	Cab	Platform	Platform	Platform	Platform
Engine										
Max power (ISO 14396) @2000 rpm	hp (kW)	75 (55)	85 (66)	95 (71)	105 (77)	120 (88)	75 (55)	85 (66)	95 (71)	105 (77)
Max torque	Nm	320	370	395	405	466	320	370	395	405
No. of cylinders / Capacity	No./cm³	4/3,400	4/3,600				4/3,400	4/3,600		
Fuel tank capacity / optional capacity	Litres	74 / 104	75 /100				75			
AdBlue tank capacity	Litres	–	10				–	10		
Transmission										
Standard transmission Mech. shuttle		12 x 12 (30 km/h)	15 x 15 (40 km/h)				12 x 12 (30 km/h)			
Optional transmission Mech. shuttle, Mech. splitter		24 x 24 (40 km/h)	30 x 30 (40 km/h Eco)				24 x 24 (40 km/h)			
Optional transmission Mech. shuttle & Speedshift		24 x 24 (40 km/h)	–				24 x 24 (40 km/h)	–		
Optional transmission PowerShuttle and Speedshift		24 x 12 (40 km/h)	30 x 15 (40 km/h Eco)				24 x 12 (40 km/h)			
30 x 15 transmission with Brake-To-Neutral		–	○				–			
Suspended front axle		○				–				
Automatic 4WD steering angle		○				–				
Linkage										
Maximum / optional lift capacity at link end	kg	2,500 / 3,000	3,100 / –				2,500 / 3,000			
Hydraulic right lift rod						○				
Hydraulic levelling & offset						○				
Optional front linkage – max lift capacity at link end	kg					1,650				
Hydraulics & PTO										
Dual pump system / Triple pump system – max flow	l/min	93 / 120								
Maximum couplers rear / mid-mounted		8 / 6	8 / 8				6 / 0			
Rear PTO Speeds		● 540 /540 Eco ○ 540 / 1,000				● 540 /540 Eco ○ 540 / 1,000				
Ground Speed PTO		○								
Front PTO – PTO speeds		○ 540 Eco or 1,000								
Operator environment										
Air Conditioning		●				–				
Air-suspended seat		○ Essential version	○ Essential version / ● Efficient version				○			
Deluxe air-suspended seat		○				–				
Multifunction joystick		● Efficient version				–				
Cat 4 filtration		–	○				–			
8 LED working lights		–	○				–			
Speedsteer steering system		–	○				–			
Headland management		–	○				–			

- Standard specification
- Optional
- Not available



# MF 3GE

## GROUND-EFFECT VERSION

WORKING UNDER TREES, IN POLYTUNNELS AND MANY OTHER LOW CROPS REQUIRES A SUITABLE SPECIALIST, WHICH IS WHY MASSEY FERGUSON CREATED THE MF 3GR. EQUIPPED WITH AN OPERATOR PLATFORM, WITH A FOLDABLE ROPS FRAME, IT CAN WORK IN AREAS WHERE IT'S NOT POSSIBLE TO ENTER WITH OTHER TRACTORS.

### KEY FEATURES:

- ▶ Compact chassis from 1.34 m wide
- ▶ Platform for low crops
- ▶ Great 360° visibility
- ▶ Standard creeper gear
- ▶ Excellent manoeuvrability and stability
- ▶ Powerful linkage and hydraulics
- ▶ Comfortable platform
- ▶ Ergonomic controls



		MF 3GE.75	MF 3GE.85	MF 3GE.95	MF 3GE.105
Operator environment		Platform	Platform	Platform	Platform
Engine					
Max power (ISO 14396) @2000 rpm	hp (kW)	75 (55)	85 (66)	95 (71)	105 (77)
Max torque	Nm	320	370	395	405
No. of cylinders / Capacity	No./cm³	4/3,400	4/3,600		
Fuel tank capacity	Litres	74	75		
AdBlue tank capacity	Litres	—	10		
Transmission					
Standard transmission Mech. shuttle Mech. splitter		24 x 24 (40 km/h)			
Optional transmission PowerShuttle and Speedshift		24 x 12 (40 km/h)			
Rear linkage					
Maximum lift capacity at link end	kg	2,500			
Optional front linkage – max lift capacity at link end	kg	1,250			
Hydraulics & PTO					
Dual pump system / Triple pump system – max flow	litre/min	93/120			
Maximum rear couplers		6			
Rear PTO Speeds		● 540 /540 Eco ○ 540 / 1,000			
Ground Speed PTO		○			
Front PTO – PTO speeds		○ 540 Eco or 1,000			
Platform operator environment					
Foldable ROPS		●			
Tiltable steering column		○			

- Standard specification
- Optional
- Not available



# MF 3WF

## WIDE FRUIT VERSION

WITH ITS WIDE FRONT AND REAR AXLES, LOW CENTRE OF GRAVITY AND POWER, THE MF 3WF IS SPECIFICALLY DESIGNED TO ENSURE SAFE AND COMFORTABLE OPERATION ON HILLSIDE VINEYARDS, ORCHARDS AND OTHER CHALLENGING TERRAIN.

### KEY FEATURES:

- ▶ Wide chassis, stable and agile
- ▶ New engine power up to 105 hp for platform & 120 hp for cab
- ▶ New 40 km/h Eco transmission (from 85 hp cab)
- ▶ Excellent manoeuvrability, optional Speedsteer
- ▶ Great 360° visibility
- ▶ Powerful linkage and hydraulics
- ▶ Comfortable 1.2 m wide cab
- ▶ Easy access platform
- ▶ Wide range of options: LED lights, defrosting mirrors, Deluxe air-suspended seat



		MF 3WF.75	MF 3WF.85	MF 3WF.95	MF 3WF.105	MF 3WF.115	MF 3WF.75	MF 3WF.85	MF 3WF.95	MF 3WF.105
Operator environment		Cab	Cab	Cab	Cab	Cab	Platform	Platform	Platform	Platform
Engine										
Max power (ISO 14396) @2000 rpm	hp (kW)	75 (55)	85 (66)	95 (71)	105 (77)	120 (88)	75 (55)	85 (66)	95 (71)	105 (77)
Max torque	Nm	320	370	395	405	466	320	370	395	405
No. of cylinders / Capacity	No./cm³	4/3,400	4/3,600				4/3,400			
Fuel tank capacity / optional capacity	Litres	74/104	75/100				75			
AdBlue tank capacity	Litres	–	10				–	10		
Transmission										
Standard transmission Mech. shuttle		12 x 12 (30 km/h)	15 x 15 (40 km/h)				12 x 12 (30 km/h)			
Optional transmission Mech. shuttle, Mech. splitter		24 x 24 (40 km/h)	30 x 30 (40 km/h Eco)				24 x 24 (40 km/h)			
Optional transmission Mech. shuttle & Speedshift		24 x 24 (40 km/h)	–				24x24 (40km/h)	–		
Optional transmission PowerShuttle and Speedshift		24 x 12 (40 km/h)	30 x 15 (40 km/h Eco)				24 x 12 (40 km/h)			
30 x 15 transmission with Brake-To-Neutral		–	○				–			
Linkage										
Maximum / optional lift capacity at link end	kg	2,500 / 3,000	3,100				2,500 / 3,000			
Optional front linkage – max lift capacity at link end	kg	1,650								
Hydraulics & PTO										
Dual pump system / Triple pump system – max flow	l/min	93 / 120								
Maximum couplers rear / mid-mounted		8 / 6	8 / 8				6 / 0			
Rear PTO Speeds		● 540 /540 Eco ○ 540 / 1,000					● 540 /540 Eco ○ 540 / 1,000			
Ground Speed PTO		○								
Front PTO – PTO speeds		○ 540 Eco or 1,000								
Operator environment										
Air Conditioning		●					–			
Air-suspended seat		○ Essential version	○ Essential version / ● Efficient version				○			
Deluxe air-suspended seat		○					–			
Cat 4 filtration		–	○				–			
8 LED working lights		–	○				–			
Speedsteer steering system		–	○				–			

- Standard specification
- Optional
- Not available



# MF 3AL

## ALPINE VERSION

WITH A CHOICE OF 85 HP, 95 HP OR 105 HP THE NEW MF 3AL SERIES IS SPECIFICALLY DESIGNED TO COMBINE STABILITY AND COMFORT WITH A HIGH STANDARD SPECIFICATION FOR DEMANDING WORK IN HILLY AREAS.

Real all-rounders, the tractors are also ideally suited to work in wide vineyards, orchards and vegetable crops as well as for a range of forestry, municipal and amenity applications. All are available with a flat-floor, which reduces the overall height to less than 2.44 m.

### KEY FEATURES:

- ▶ Low centre of gravity, low-profile versions
- ▶ Flat-floor
- ▶ Multi-purpose version
- ▶ High comfort fully equipped Efficient model
- ▶ New 40 km/h Eco transmission (from 85 hp cab)
- ▶ Excellent manoeuvrability
- ▶ Great 360° visibility
- ▶ Powerful linkage and hydraulics
- ▶ Wide suspended front axle
- ▶ Comfortable 1.4 m wide cab
- ▶ Front loader: MF FL 3117 X, MF FL 3114 X, MF FL 3522, MF FL 3615
- ▶ Wide range of options




		MF 3AL.85	MF 3AL.95	MF 3AL.105
Operator environment		Flat-floor cab	Flat-floor cab	Flat-floor cab
Engine				
Max power (ISO 14396) @2000 rpm	hp (kW)	85 (66)	95 (71)	105 (77)
Max torque	Nm	370	395	405
No. of cylinders / Capacity	No./cm³	4/3,600		
Fuel tank capacity	Litres	105		
AdBlue tank capacity	Litres	10		
Transmission				
Standard transmission PowerShuttle and Speedshift		30 x 15 (40 km/h Eco)		
30 x 15 transmission with Brake-To-Neutral		○		
Suspended front axle		○		
Linkage				
Maximum lift capacity at link end	kg	3,100		
Hydraulic right lift rod		○		
Optional front linkage – max lift capacity at link end		1,650		
Hydraulics & PTO				
3 pump system – max flow	l/min	120		
Maximum couplers rear / mid mounted		8 / 8		
Rear PTO Speeds		● 540 / 540 Eco ○ 540 / 1,000		
Ground Speed PTO		○		
Front PTO – PTO speeds		○ 540 Eco or 1,000		
Front loader				
Front loader		○		
Cab operator environment				
Version		Flat-floor cab		
Air Conditioning		●		
Air-suspended seat		●		
Deluxe air-suspended seat		○		

● Standard specification  
○ Optional  
– Not available




DIMENSIONS: 75 hp cab models

			VI	SP	FR	WF
A	Cab height from rear axle	mm	1,803	1,803	1,803	1,803
B	Overall height with specified tyres (see table below)	mm	2,403*	2,403*	2,453**	2,453***
D	Overall length to front support	mm	4,073	4,073	4,073	4,073
E	Wheelbase	mm	2,148	2,148	2,124	2,124
G	Cabin width	mm	1,000	1,200	1,200	1,200
F	Rear fender to fender external width	mm	1,000	1,300	1,450	1,450
I	Rear fender to fender internal width	mm	450	520	600	600
H	Ground clearance	mm	277*	303*	368**	414***

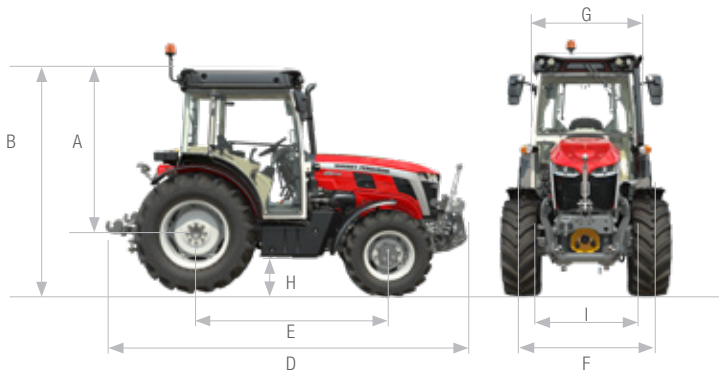

DIMENSIONS: 75 hp platform models

			FR	WF	GE
A	ROPS height from rear axle	mm	1,987	1,987	1,987
B	Overall height with specified tyres (see table below)	mm	2,637**	2,637***	2,562****
C	Bonnet height	mm	830	830	830
D	Overall length to front support	mm	4,073	4,073	4,073
E	Wheelbase	mm	2,124	2,124	2,085
F	Rear fender to fender external width	mm	1,450	1,450	1,150
H	Ground clearance	mm	336**	365***	287****
I	Rear fender to fender internal width	mm	600	600	520

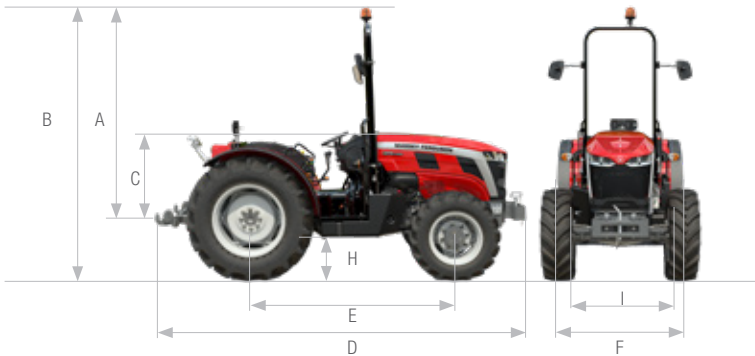

TYRES

Cab:	*320/85R28	**420/70R28	***480/65R28	****420/85R30
Platform:		**420/70R28	***480/65R28	**** 380/70R24

DIMENSIONS: from 85 hp cab models

			VI	SP	FR	WF	AL Flat-floor
A	Cab height from rear axle	mm	1,835	1,835	1,835	1,835	1,855
B	Overall height with specified tyres (see table below)	mm	2,435*	2,435*	2,485*	2,485***	2,554****
D	Overall length to front support	mm	4,192	4,192	4,022	4,068	4,223
E	Wheelbase	mm	2,178	2,178	2,155	2,155	2,187
G	Cabin width	mm	1,000	1,200	1,200	1,200	1,400
F	Rear fender to fender external width	mm	1,000	1,300	1,450	1,450	1,674
I	Rear fender to fender internal width	mm	450	520	600	600	890
H	Ground clearance	mm	270*	312*	365**	375***	475****

DIMENSIONS: from 85 hp platform models

			FR	WF	GE
A	ROPS height from rear axle	mm	2,099	2,099	2,099
B	Overall height with specified tyres (see table below)	mm	2,749**	2,749***	2,674*
C	Bonnet height	mm	880	880	880
D	Overall length to front support	mm	4,101	4,101	4,101
E	Wheelbase	mm	2,155	2,155	2,115
F	Rear fender to fender external width	mm	1,450	1,450	1,150
H	Ground clearance	mm	365**	329***	226*
I	Rear fender to fender internal width	mm	600	600	450

TYRES

Cab:	*320/85R28	**420/70R28	***480/65R28	****540/65R30
Platform:	*380/70R24	**420/70R28	***480/65R28	

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.





THE  
PERFECT  
FIT

# PARTS AND SERVICE

FROM THE MOMENT YOU PURCHASE YOUR  
MASSEY FERGUSON MACHINE YOU ARE  
SUPPORTED BY THE EXPERTISE OF OUR

## AFTERSALES TEAM.

Always by your side to help maximise your  
profits and efficiency.

Supplying everything you need for your  
machine to perform at its best.



## YOUR MACHINE EXPERTS

You can rely on your Massey Ferguson dealer for  
servicing, maintenance and repairs. And trust  
their advice on the latest smart farming solutions,  
innovative accessories and replacement parts.

Your Massey Ferguson Dealer will supply you with  
all the farming essentials you need from lubricants  
and batteries to AdBlue®, and care kits.

With skilled technicians and expert staff, our  
dealers pride themselves on always delivering  
excellent customer service.




## GENUINE PARTS, GENUINE VALUE

Premium quality parts with best-in-class availability,  
AGCO Genuine Parts offer excellent value. Engineered to  
be the perfect fit for your Massey Ferguson. Designed to  
safeguard your machine value and protect your uptime.

AGCO Parts are covered by a 12-month warranty,  
including labour when fitted by a Massey Ferguson  
dealer.

Your dealer can support  
you with the parts you need  
but you can also use the  
'AGCO Parts Books to go'  
app. Download from the App  
Store or from the Google  
Play Store. Your personal  
access data is available  
from your MF Dealer.

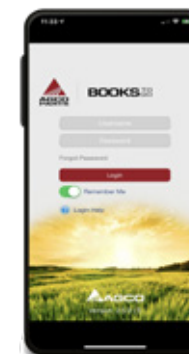

## AGCO FINANCE

YOUR PARTNER TO GROW YOUR  
BUSINESS.

As the financial services provider for  
Massey Ferguson, we help you obtain your MF  
equipment through our tailored finance solutions,  
enabling usage or ownership of the world's best  
agricultural equipment.

**Full Reliability:** 30+ years of agricultural industry  
experience around the globe.

**Full convenience:** Conveniently through your local  
MF Dealer.

**Full Partnership:** We are with you along the way,  
through your entire business cycle.



## MASSEY FERGUSON COLLECTION

NOW YOU CAN LOOK AS STYLISH AS  
YOUR MASSEY FERGUSON.

Are you looking for a cap match your MF 3S, or  
some stylish and durable overalls to keep you  
clean and smart at work?  
We have an exclusive range of high quality  
products to suit you, your farming activity,  
your family and your lifestyle.

To find out what we have available please visit our  
online shop:

[Shop.MasseyFerguson.Com](http://Shop.MasseyFerguson.Com)

For the above support packages, country terms and conditions apply.  
Please note all packages may not be available in all markets.

Please check with your local MF Dealer/Distributor.





[www.MasseyFerguson.co.uk](http://www.MasseyFerguson.co.uk)

[www.facebook.com/masseyfergusonUK](https://www.facebook.com/masseyfergusonUK)

[Twitter.com/MF\\_EAME](https://twitter.com/MF_EAME)

[Instagram.com/MasseyFergusonUK](https://www.instagram.com/MasseyFergusonUK)

[www.YouTube.com/MasseyFergusonUK](https://www.YouTube.com/MasseyFergusonUK)



**MASSEY FERGUSON®** is a worldwide brand of AGCO.  
© AGCO Corporation | A-A-17870 | English



**MASSEY FERGUSON**

BORN TO **FARM**